

INSTRUCTIONS:




1 Remove nuts, bolts and washers from the base then lift off body

2 Remove base

3-5 Base and caster assembly

6 Attach the chest side handles with (2) bolts each.

Insert the side handle into the cabinet and attach with (4) bolts and washers

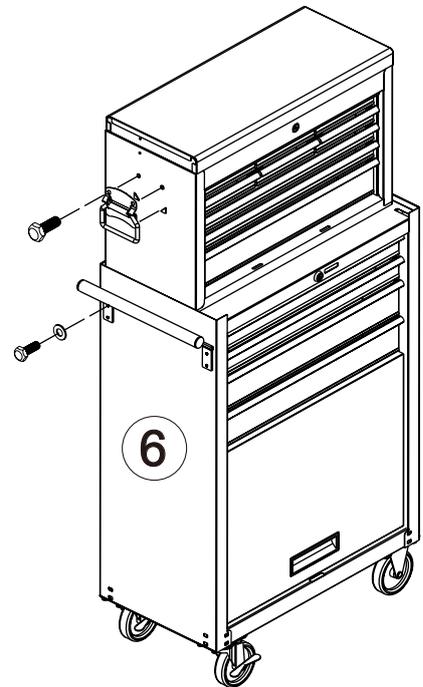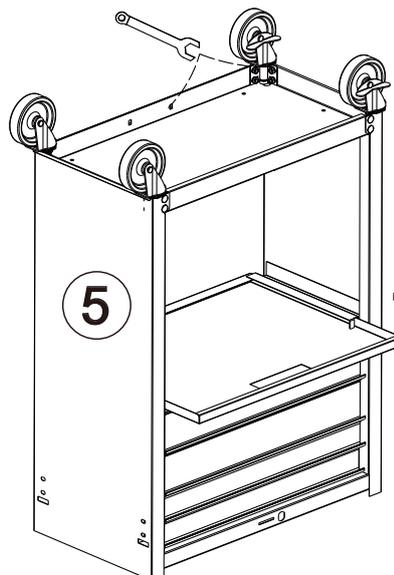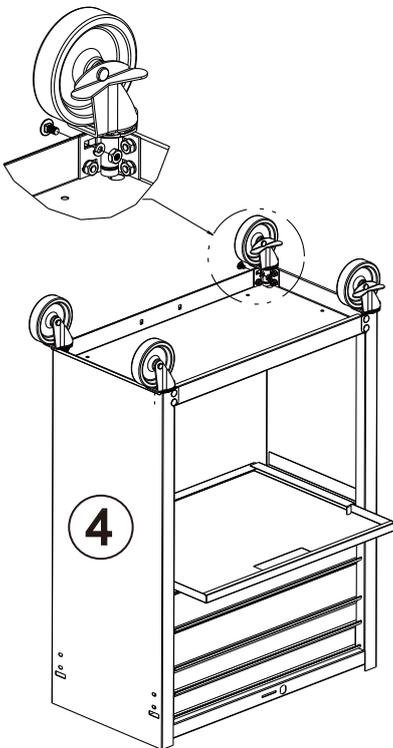

MAINTENANCE

Periodically lubricate casters and tighten all hardware

TO AVOID TIPPING, OPEN ONE DRAWER AT A TIME AND CLOSE ALL DRAWERS WHEN MOVING.